


DRAWING IV  
BITUMINOUS CONCRETE BERM  
 NTS

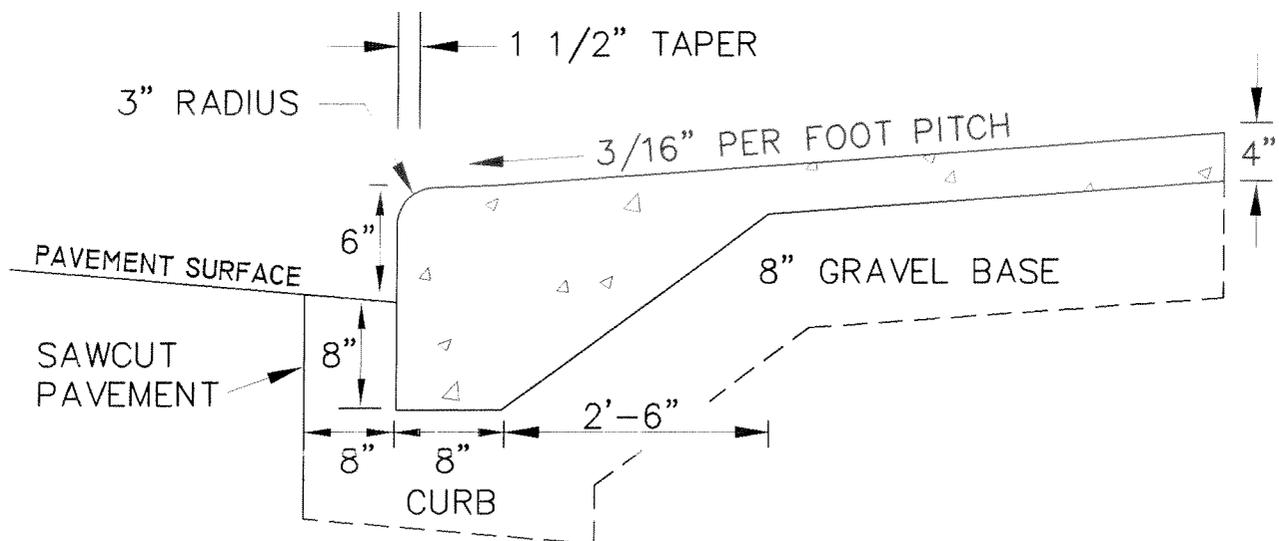



DRAWING VII  
CONCRETE WALK WITH INTEGRAL CURB  
 NTS

STREET OPENING  
 PERMIT MANUAL

CITY OF LYNN  
 DEPARTMENT OF PUBLIC WORKS  
 ENGINEERING

September 1998

STPMT.DWG

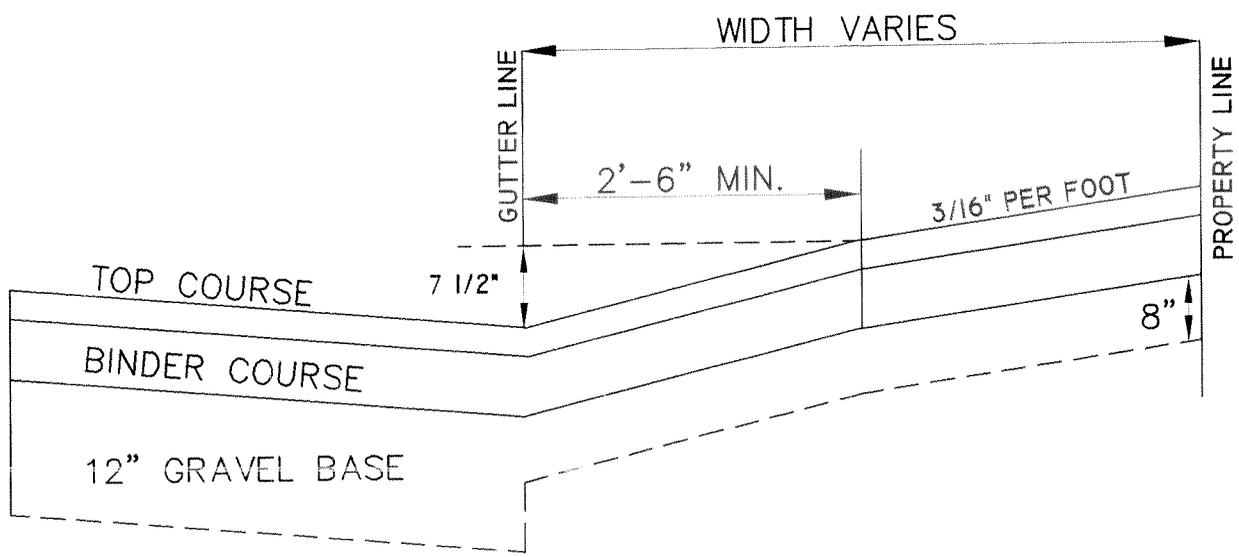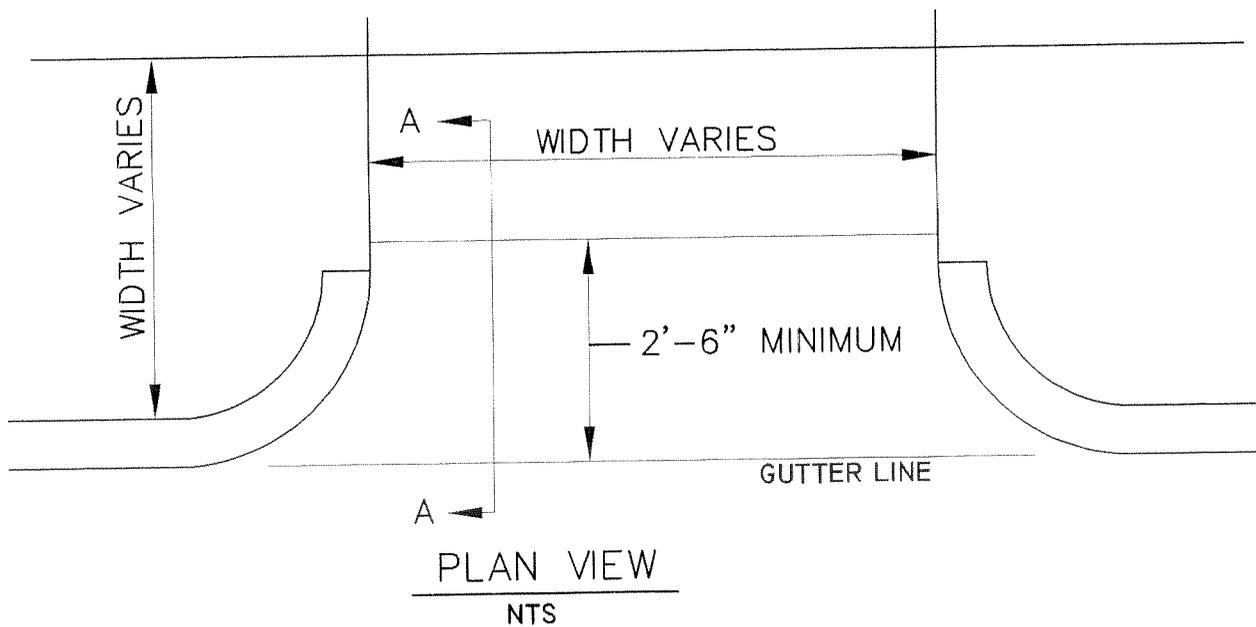


**DRIVEWAY SECTION  
DRAWING III**

**STREET OPENING  
PERMIT MANUAL**

**CITY OF LYNN  
DEPARTMENT OF PUBLIC WORKS  
ENGINEERING**


**September 1998**

STPMT.DWG

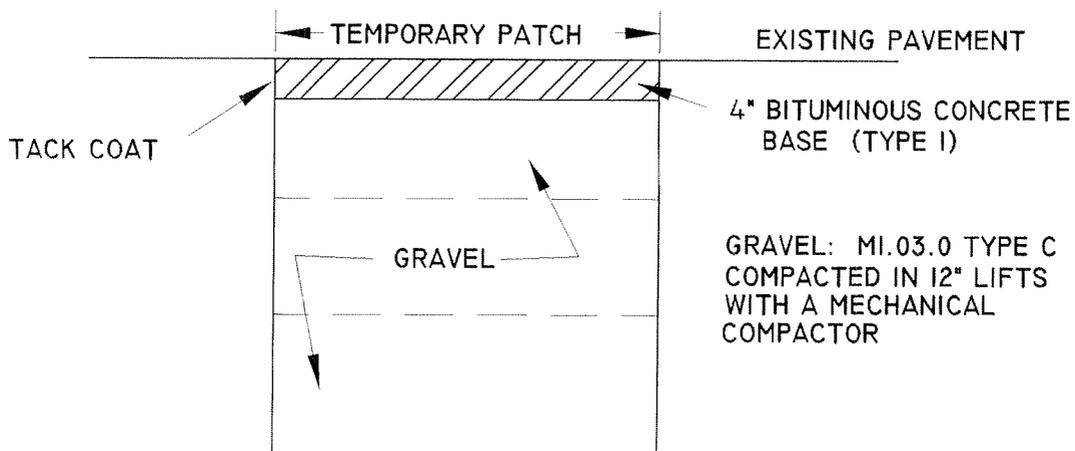

DRAWING 1 – TEMPORARY PATCH

NTS

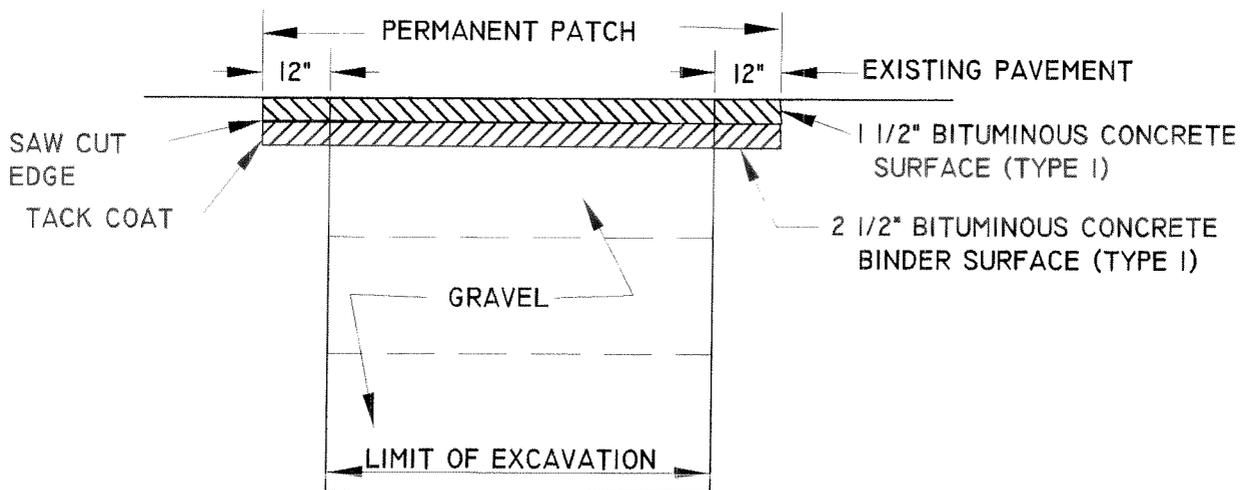

DRAWING II – PERMANENT PATCH  
CONVENTIONAL

NTS





NOTE: PERMANENT PATCH FOR ROADS HAVING A PAVING BLOCK OR CONCRETE BASE SHALL INCLUDE A LAYER OF BITUMINOUS CONCRETE (BINDER COURSE) EQUAL TO THE DEPTH OF THE EXISTING CONCRETE OR PAVING BLOCK.

**STREET OPENING  
PERMIT MANUAL**

**CITY OF LYNN  
DEPARTMENT OF PUBLIC WORKS  
ENGINEERING**

**September 1998**

STPMT.DWG

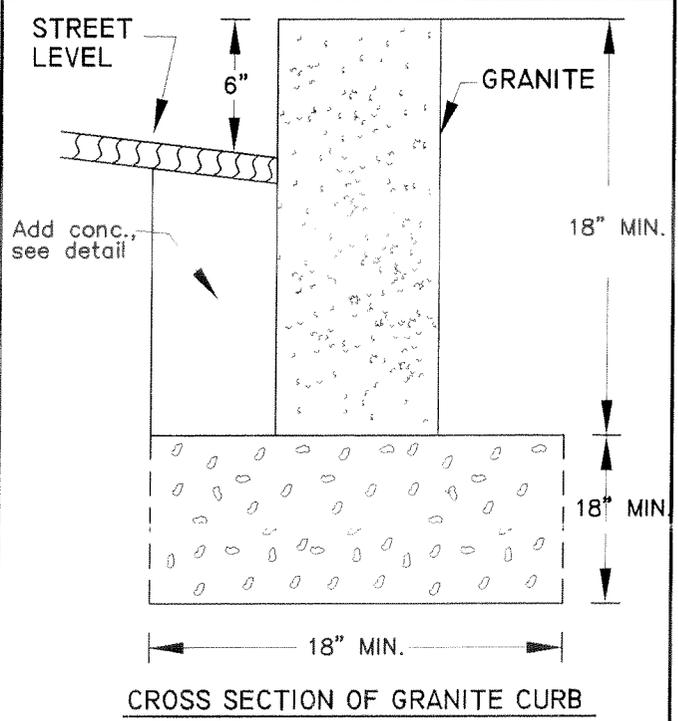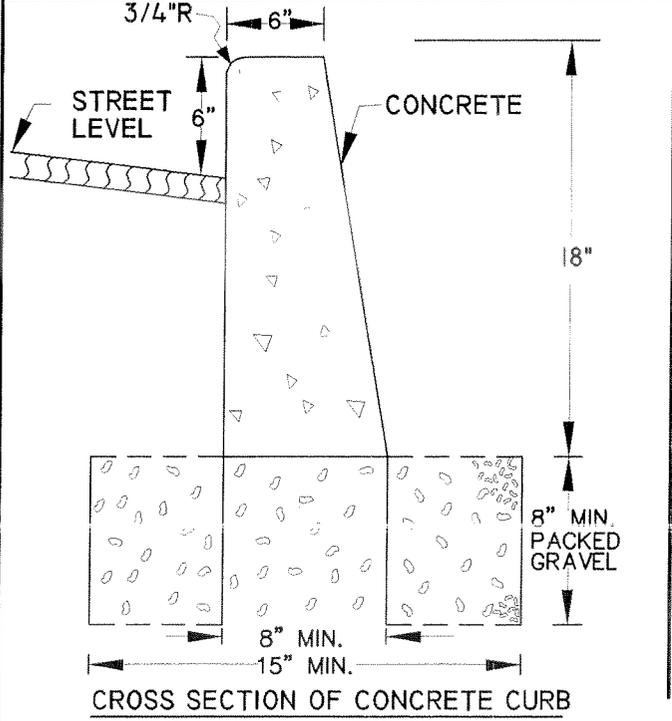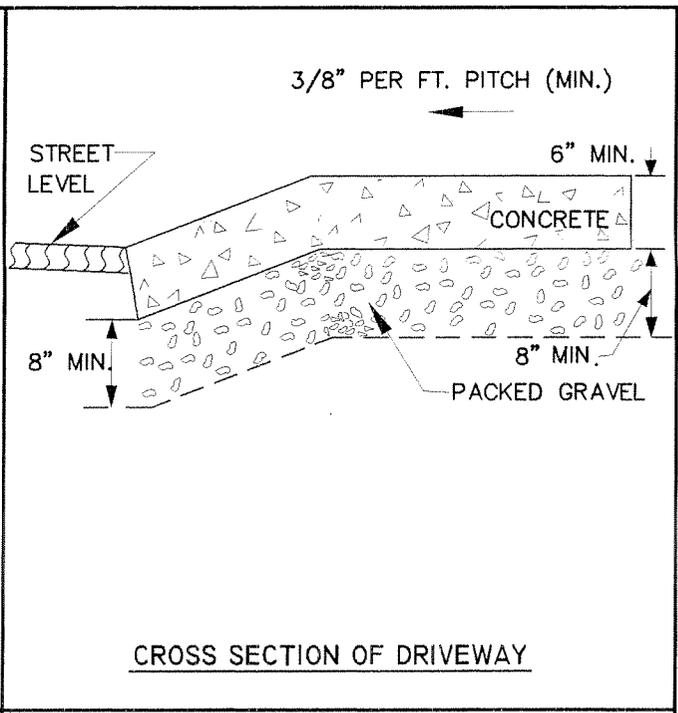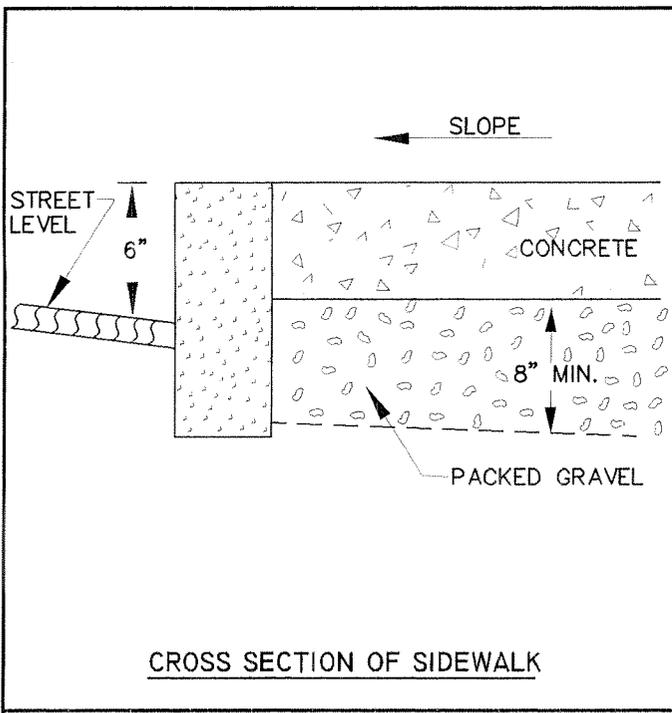


DRAWING V  
VERTICAL CURB  
NTS

STREET OPENING  
PERMIT MANUAL

CITY OF LYNN  
DEPARTMENT OF PUBLIC WORKS  
ENGINEERING

September 1998

STPMT.DWG

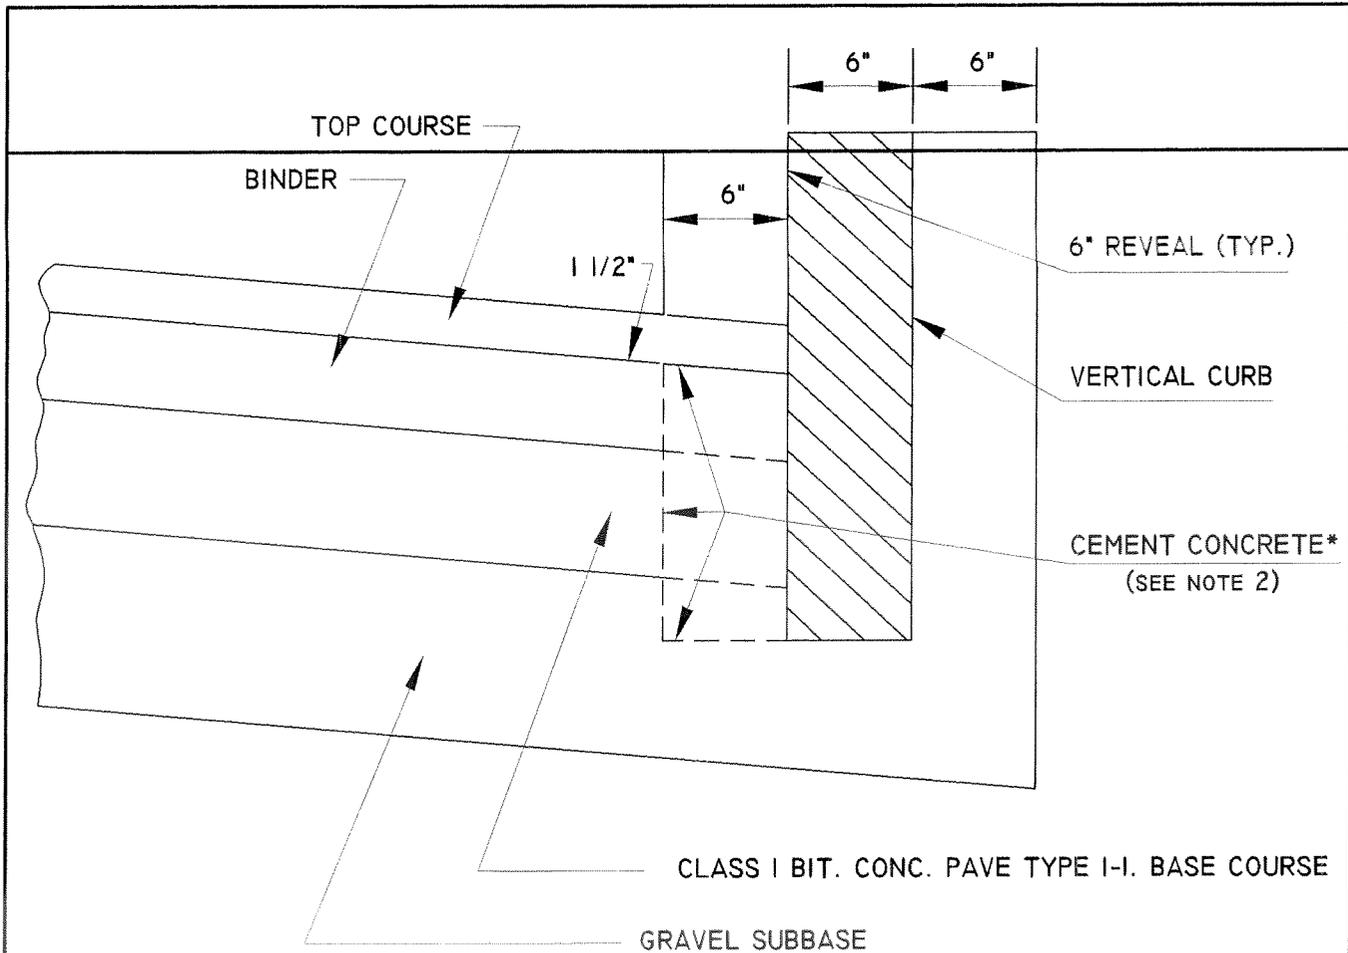

\*PROCEDURE DESCRIBED HEREIN IS APPLICABLE ONLY IF CURB IS TO BE SET OR RESET AFTER BASE AND/OR BINDER COURSES ARE IN PLACE; OTHERWISE CEMENT CONC. WILL BE ELIMINATED AND GRAVEL BROUGHT UP TO BOTTOM OF BASE COURSE.  
 FOR DESCRIPTION, MATERIALS AND CONSTRUCTION METHOD, SEE SPECIFICATIONS.

NOTES:

1. CUT NEAT LINE 6" FROM CURB LINE AND REMOVE BINDER, BASE AND STONE, REPLACE WITH CEMENT CONCRETE.
2. ANY CLASS CEMENT CONCRETE THAT IS ACCEPTABLE TO THE DEPT. UNDER SECTION M4 OF THE 1993 STANDARD SPECIFICATIONS; ALL TEST REQUIREMENTS ARE WAIVED. BITUMINOUS CONCRETE IS NOT TO BE USED AS A SUBSTITUTE.
3. PAYMENT FOR CEMENT CONCRETE WILL BE INCLUDED IN THE PRICE PER LINEAL FOOT OF CURBING.

DRAWING VI  
VERTICAL CURB  
 NTS

STREET OPENING  
 PERMIT MANUAL

CITY OF LYNN  
 DEPARTMENT OF PUBLIC WORKS  
 ENGINEERING

September 1998

STPMT.DWG